


# Analog input board, optically isolated, 16 differential inputs, 16-bit

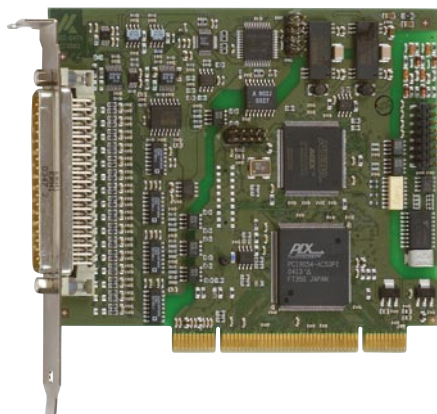

## APCI-3002

PCI 3.3 V or 5 V

Optical isolation 1000 V

16 differential inputs,  
200 kHz throughput

16-bit resolution

PCI DMA, programmable gain

Trigger functions, timer

8 optically isolated digital I/O, 24 V

## Features

- PCI 3.3 V or 5 V

### Analog inputs

- 16 differential inputs
- 16-bit resolution
- Throughput: 200 kHz
- Voltage inputs: 0-10 V,  $\pm 10$  V, 0-5 V,  $\pm 5$  V, 0-2 V,  $\pm 2$  V, 0-1 V,  $\pm 1$  V, freely programmable through software for each channel
- Current inputs: 0-20 mA (option) can be combined freely with voltage inputs
- Gain PGA x1, x2, x5, x10 freely programmable through software for each channel

### Analog acquisition

- Different input modes for the analog acquisition:
  - 1) Simple mode
  - 2) Scan modes
  - 3) Sequence modes
  - 4) Auto Refresh mode
- Trigger functions:
  - software trigger or
  - external trigger: the analog acquisition (single or sequence) is started through the signal on digital input 0 from 0 V to 24 V
- Onboard FIFO
- PCI-DMA

### 24 V digital

- 24 V digital I/O enable a high interference distance and a long distance between signal transmitter and data acquisition
- 4 digital inputs, 24 V, optically isolated
- 4 digital outputs, 24 V, optically isolated

### Timer

- 1, 12-bit

### Safety features

- For more protection in noisy industrial environment
- Optical isolation 1000 V
- Creeping distance IEC 61010-1
- Overvoltage protection  $\pm 40$  V
- Protection against high-frequency EMI
- Input filters
- Noise neutralisation of the PC supply

## Applications

- Industrial process control
- Industrial measurement and monitoring
- Multichannel data acquisition
- Control of chemical processes
- Factory automation
- Acquisition of sensors
- Laboratory equipment
- Current measurement
- Instrumentation

## Software drivers

A CD-ROM with the following software and programming examples is supplied with the board.

### Standard drivers for:

- Linux (real-time)
- 32-bit drivers for Windows 7/Vista/XP/2000 (real-time)
- Signed 64-bit drivers for Windows 7/XP

### Drivers and samples for the following compilers and software packages:

- .NET
- Microsoft VC++ • Borland C++
- Visual Basic • Delphi
- LabVIEW • LabWindows/CVI

### ADDIPACK functions:

Analog input • Digital input • Digital output • Timer

### On request:

Further operating systems, compilers and samples.

Driver download: [www.addi-data.com](http://www.addi-data.com), download menu



PCI 32-bit



Signed 64-bit drivers for  
Windows 7/Vista/XP



LabVIEW™



LabWindows/CVI™



### Customer-tailored modifications

designed

to suit your needs.

Hardware and software,  
firmware, PLDs, ...

Contact us!

## Specifications

### Analog inputs

Number of inputs:	16 differential inputs
Resolution:	16-bit
Optical isolation:	1000 V through opto-couplers from PC to peripheral
Input ranges:	Software-programmable for each channel 0-10 V, $\pm 10$ V, 0-5 V, $\pm 5$ V, 0-2 V, $\pm 2$ V, 0-1 V, $\pm 1$ V 0-20 mA optional
Gain:	Software programmable (x1, x2, x5, x10)
Throughput:	200 kHz
Trigger:	Through software, timer, external event (24 V input)
Data transfer:	Data to the PC through FIFO memory, Interrupt at EOC (End Of Conversion), DMA transfer at EOC
Interrupts:	End of conversion, at timer overrun, End of scan

### Digital I/O

Number of I/O channels:	4 digital inputs, 24 V, 4 digital outputs, 24 V, 50 mA typ., Open Collector
Logical "0" Level:	0-14 V
Logical "1" Level:	19-30 V
Optical isolation:	1000 V through opto-couplers from PC to peripheral

### EMC – Electromagnetic compatibility

The product complies with the European EMC directive. The tests were carried out by a certified EMC laboratory in accordance with the norm from the EN 61326 series (IEC 61326). The limit values as set out by the European EMC directive for an industrial environment are complied with. The respective EMC test report is available on request.


### Physical and environmental conditions

Dimensions:	175 x 99 mm
System bus:	PCI 32-bit 3.3/5V acc. to specification 2.2 (PCISiG)
Space required:	1 PCI slot for analog inputs, 1 slot opening for digital I/O
Operating voltage:	+ 5 V, $\pm 5$ % from the PC
Current consumption:	814 mA $\pm 10$ mA
Front connector:	37-pin D-Sub male connector
Additional connector:	16-pin male connector for ribbon cable for connecting the digital inputs and outputs
Temperature range:	0 to 60 °C (with forced cooling)

Screw terminal panel PX901-AG  
with cable ST010



### Simplified block diagram

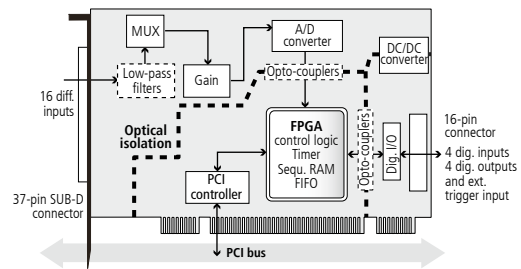


### Pin assignment – 37-pin D-Sub male connector

Analog input 0+	20	1	Analog input 0-
Analog input 1+	21	2	Analog input 1-
Analog input 2+	22	3	Analog input 2-
Analog input 3+	23	4	Analog input 3-
Analog input 4+	24	5	Analog input 4-
Analog input 5+	25	6	Analog input 5-
Analog input 6+	26	7	Analog input 6-
Analog input 7+	27	8	Analog input 7-
Analog signal ground	28	9	Analog signal ground
Analog signal ground	29	10	Analog signal ground
Analog input 8+	30	11	Analog input 8-
Analog input 9+	31	12	Analog input 9-
Analog input 10+	32	13	Analog input 10-
Analog input 11+	33	14	Analog input 11-
Analog input 12+	34	15	Analog input 12-
Analog input 13+	35	16	Analog input 13-
Analog input 14+	36	17	Analog input 14-
Analog input 15+	37	18	Analog input 15-
		19	not connected

### Pin assignment – 16-pin male connector

Digital input 3 -	16	15	Digital input 3 +
Digital input 2 -	14	13	Digital input 2 +
Digital input 1 -	12	11	Digital input 1 +
Digital input 0 -	10	9	Digital input 0 +
24 V ext.	8	7	OC output 3 (24 V)
24 V ext.	6	5	OC output 2 (24 V)
Ground (dig. outputs)	4	3	OC output 1 (24 V)
Ground (dig. outputs)	2	1	OC output 0 (24 V)

### ADDI-DATA connection

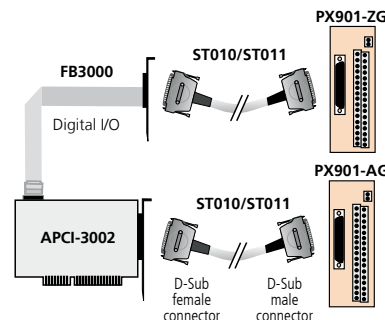

## Ordering information

### APCI-3002

Analog input board, optically isolated, 16 diff. inputs, 8 digital I/O, 16-bit. Incl. technical description and software drivers.

### Options

Please indicate the number of channels

**Option PC-diff:** Current input for 1 differential channel 0(4)-20 mA

**Option DF:** Precision filter for 1 channel

### Accessories

**PX901-AG:** Screw terminal panel with transorb diodes, with housing for DIN rail for connecting the analog inputs

**PX901-ZG:** Screw terminal panel for connecting the digital I/O, for DIN rail

**ST010:** Standard round cable, shielded, twisted pairs, 2 m

**ST011:** Standard round cable, shielded, twisted pairs, 5 m

**FB3000:** Ribbon cable for digital I/O