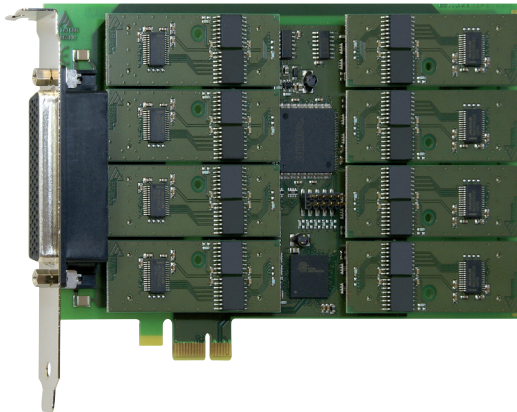


4-port serial interface, RS232, RS422, RS485, 20 mA CL, modular mounting through modules



The APCLe-7500/4C communication boards are configured by inserting SI modules which the board identifies automatically. The serial interfaces can be configured through modules in the following modes: RS232, RS422, RS485 and current loop (with optical isolation). The SI modules with optical isolation allow a protection of up to 1000 V for the use in noisy environments where ground loops can occur. The I/O lines are protected against short-circuits, fast transients, electrostatic discharge and high-frequency EMI. The interface is supported through a 128-byte FIFO buffer for sending and receiving data and guarantees reliable operation at high transfer rates.

Features

- Asynchronous communication adapter
- Modular mounting through SI modules: 4 sockets for 4-port serial interface
- Can be configured as RS232, RS422, RS485, 20 mA Current Loop (active, passive), with optical isolation through separate SI modules
- Automatic addressing through BIOS
- Automatic module identification
- UART 16C950, downward compatible to 16C450
- 128-byte FIFO buffer for sending and receiving data
- Programmable transfer rate
- 5-, 6-, 7- or 8-bit character
- 1, 1½ or 2 stop bits
- Parity: even, odd or none
- Automatic transmitter control for RS485 and transmitter control through FIFO level
- Common interrupt

Safety features

- SI modules with optical isolation 1000 V
- Creeping distance IEC 61010-1 (VDE411-1)
- Protection against fast transients (Burst)
- Short-circuit protection for RS422 and RS485
- Internal diagnostic possibility, break, parity, overrun and framing error

APCLe-7500/4C – 4-port serial interface

RS232, RS422, RS485, 20 mA Current Loop

Free mode configuration for each port through SI modules

With optical isolation 1000 V

128-byte FIFO buffer for each port

16C950-compatible UART

Applications

- Industrial serial communication
- Data acquisition
- Multi-user systems
- PLC interface
- Multidrop applications
- Modem and printer control, etc.

Software





Drivers and samples

A CD containing standard drivers as well as programming samples (source code or compiled) for different programming environments is supplied with the board.

This software can also be downloaded for free from our website (www.addi-data.com/downloads).

Software for other operating systems and programming environments is available on request.

SI modules

| Operating mode | RS232 | RS422 | RS485 | 20 mA CL |
|----------------------------|---|---|---|---|
| |  |  |  |  |
| | SI232-G | SI422-G | SI485-G | SITTY |
| Optical isolation 1000 V | O | O | O | O |
| Creeping distance 3.2 mm | O | O | O | O |
| Short-circuit protection | | O | O | |
| ESD protection | O | O | O | O |
| Burst protection | O | O | O | O |
| Duplex | Full | Full | Half | Full |
| Max. Baud rate | 1 MBaud | 1 MBaud | 1 MBaud | 19.2 kBaud |
| Modem control signals | O | Optional RTS/CTS (SI-422-PEP) | | |
| Autom. transmitter control | | | O | |
| Current consumption | 16 mA | 15 mA | 15 mA | 82 mA |

Specifications

APCle-7500/4C

Serial interface – 4-port

| | |
|--------------------|--|
| Mode: | RS232, RS422, RS485, 20 mA Current Loop (active, passive) with optical isolation through separate SI modules |
| Transmission mode: | Asynchronous, full or half duplex (SI modules) |
| Addressing: | Automatic through BIOS |
| Memory: | 128-byte FIFO buffer for transmitter and receiver |
| Transfer rate: | Programmable up to 1 MBaud; transfer rate up to 2.5 MBaud on request |
| Protocol: | 5-, 6-, 7- or 8-bit character; 1, 1½ or 2 stop bits |
| Parity: | Even, odd, none, mark, space |
| Interrupt lines: | Automatic configuration through BIOS |

EMC – Electromagnetic compatibility

The product complies with the European EMC directive. The tests were carried out by a certified EMC laboratory in accordance with the standard DIN EN IEC 61326-1. The limit values as set out by the European EMC directive for an industrial environment are complied with. The respective EMC test report is available on request.

Safety features

| | |
|--------------------|---------------------|
| Optical isolation: | 1000 V (SI modules) |
|--------------------|---------------------|

Physical and environmental conditions

| | |
|--------------------|---|
| Dimensions: | 168 x 99 mm |
| System bus: | 1-/4-/8-/16-lane PCI Express acc. to PCI Express base specification, Revision 1.0a (PCI Express 1.0a) |
| Space required: | 1 PCI Express slot |
| Operating voltage: | +3.3 V from the PC |
| Front connector: | 4 x 9-pin D-Sub male connector |

| | |
|--------------------|----------------------------------|
| Temperature range: | 0 to 60 °C (with forced cooling) |
|--------------------|----------------------------------|

Ordering information

APCle-7500-4C

APCle-7500/4C: 4-port serial interface (4 x 9-pin D-Sub)
Each incl. technical description and software drivers.

SI modules

Please order the modules separately!

| | |
|-------------------|---|
| SI232-G: | RS232 mode, optically isolated |
| SI422-G: | RS422 mode, optically isolated |
| SI422-PEP: | RS422 mode, optically isolated, with RTS/CTS |
| SI485-G: | RS485 mode, optically isolated |
| SITTY: | 20 mA Current Loop mode (active, passive), optically isolated |

Accessories

| | |
|---------------|--|
| ST075: | Shielded round cable, 37-pin to 4 x 9-pin |
| ST074: | Shielded round cable, 37-pin to 4 x 25-pin |